



Hanco International

A Division of the Hannon Company

HANCO Line Hose Washer*



Model LHW4

Features:

- New & Revolutionary
- Scrubs inside line hose in less than 3 minutes
- Eliminates difficult manual labor
- Greatly increases productivity
- Quickly pays for itself in labor/time savings
- Extended reach to wash all lengths of line hose
- Fast brush changes, NO TOOLS REQUIRED
- Self contained unit, can be mounted on a table or moved
- Optional soak and rinse tanks available
- Clear polycarbonate shield to protect operator and support line hose
- Three brush sizes can clean all diameters of line hose
- Three brushes of your choice included with unit

* Patent Pending

Specifications:

- GFCI protected for operator safety
- Illuminated On/Off switch with circuit breaker
- 14 gauge stainless steel construction for corrosion resistance
- Heavy duty nickel plated bearing for maximum durability
- 137 RPM brush speed
- 120 Volts, 50/60 Hz, single phase, 8 Amps
- Weight: 120 lbs.

Brushes:

- Small (1-1/4") for 1" to 1-1/4" I.D. Line Hose
- Medium (2") for 1-1/2" to 2" I.D. Line Hose
- Large (2-3/4") for 2" to 2-1/2" I.D. Line Hose
- Includes brush welded to new shaft

***When ordering new brushes, please specify size

Automated HANCO Washer for Rubber Goods



Model AW824
Model AW830

These washing machines have been engineered to clean rubber goods, especially the extra long line hose. With a single door on the top of the cabinet, and single door access to the drum, loading line hose has never been easier. The large 46" x 46" blankets are also easier to load into the machine. Dual automatic rinse cycles are standard on all washers.

Features:

- Microprocessor controlled
- Simple Start/Stop controls
- Available in two sizes: 24" dia. drum (AW824) or 30" dia. drum (AW830)
- Standard 8 foot long drum will accommodate the largest line hose
- Single door cabinet and drum for ease of loading/unloading
- Heavy gauge, all stainless steel construction
- Automatic wash and rinse cycles
- Formula 515 Cleaner and Formula 516 Coating Beads are recommended
- For washing hoses, hoods, blankets, gloves, sleeves, cover-ups, and jumpers (disassembled)


Specifications:

- 230/460 Volts, 50/60 Hz, 3 phase with ground, 20 Amps
- Size: Model AW824 11'0" W x 2'6" D x 3'0" H
Model AW830 11'0" W x 3'0" D x 3'6" H
- Weight: Model AW824 2400 lbs. net weight
Model AW830 2900 lbs. net weight
- Capacity: Model AW824 150 lbs.
Model AW830 200 lbs.

Requirements:

- Level concrete floor recommended
- Water line with minimum of 60 psi
- Floor drain

Automated HANCO Dryer for Rubber Goods

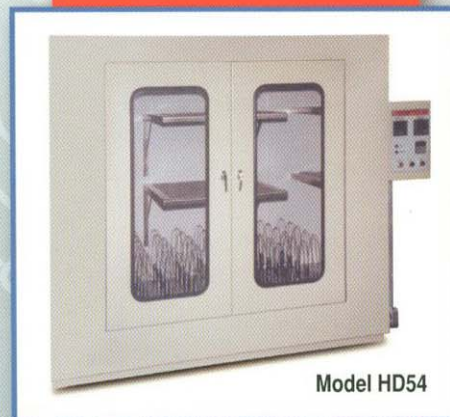

Model HD54

Hanco's Automated dryers have been engineered to dry rubber goods. The racks are configured to allow maximum airflow around the rubber goods. With the Digital Control System, the machine is simple to operate. Door interlock system will turn off heaters when the doors are opened. Exhaust fan will continue to operate after the doors are opened to prevent hot air from spilling into the room.

Features:

- Digital temperature control system
- Simple Start/Stop controls
- Easy to adjust digital time and temperature settings
- Capabilities of 54 gloves/sleeves, 50 hoses/hoods, 12 blankets, cover-ups and jumpers
- Dual door cabinet with Lexan windows
- Heavy gauge stainless steel and steel construction
- Automatic shutoff cycle with thermal protection

Requirements:

- 240 Volts, 50/60 Hz, single phase with ground, 60 Amps
- Level concrete floor recommended
- 14" exhaust duct
- 18" clearance on both sides of dryer