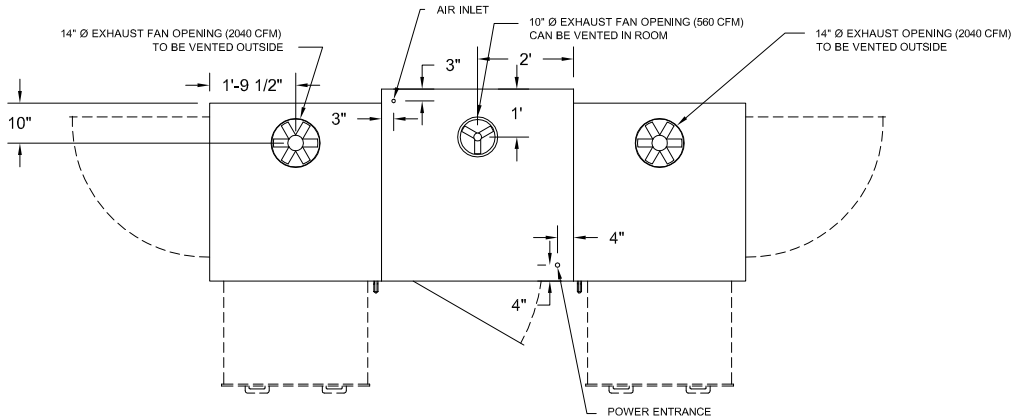

PLAN VIEW

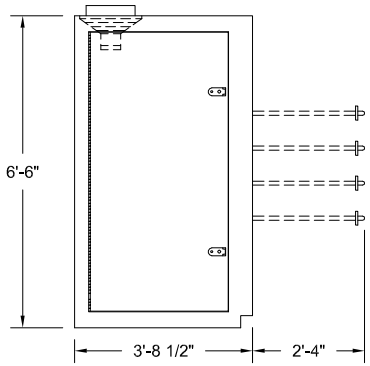

LEFT END VIEW

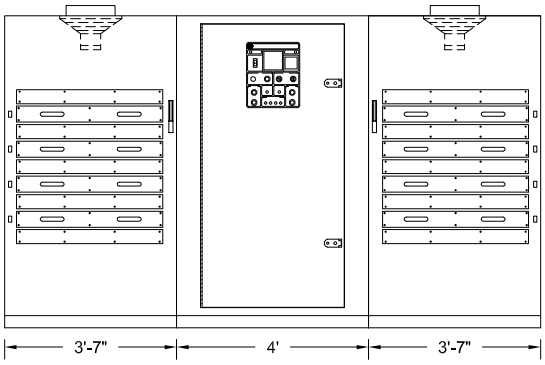

FRONT VIEW



RIGHT END VIEW

NOTE 1: 240 VOLT, 60Hz, SINGLE PHASE POWER ENTRANCE.
(TWO #6 PLUS ONE #6 BUILDING GROUND IN 1 1/2" CONDUIT)
OTHER VOLTAGE INPUTS AVAILABLE UPON REQUEST.

NOTE 2: 3/8" NPT AIR INLET (60 PSI MINIMUM, BULKHEAD FITTING PROVIDED) FILTER, REGULATOR, AND SHUT OFF PROVIDED ON SUBPANEL INSIDE POWER PANEL CABINET.

APPOX. SHIPPING WEIGHT: 4400 LBS.

- REFERENCES AND REVISIONS -

REV.	DATE:	REMARKS:	BY:
A	2-11-1997	POWER PANEL WAS D8176	TRW
B	12-15-1997	EXHAUST WAS 12" OPENING	TRW

This drawing is proprietary information and considered intellectual property of Hanco International. Unauthorized reproducing, electronic transmission, or distribution without written authorization of Hanco International is prohibited.

HANCO INTERNATIONAL
DIVISION OF THE HANNON COMPANY
1605 WAYNESBURG DR. SE
CANTON, OHIO, U.S.A. 44707
PH: 330/456-4728 FAX: 330/456-3323

TITLE:
36" MAX 8-DRAWER BLANKET TESTER
WITH DA SERIES POWER PANEL

DATE:	SCALE:	SHEET:
5-9-1988	1/4" = 1'	1 OF 1

DRAWN BY	SERIES:	DRAWING NO.:
RW	DA	A8179