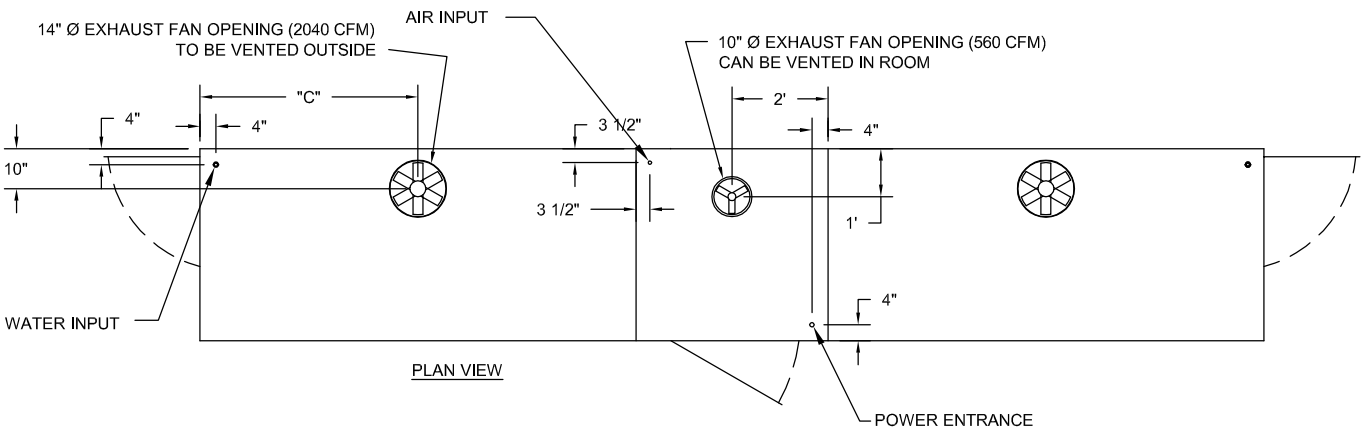

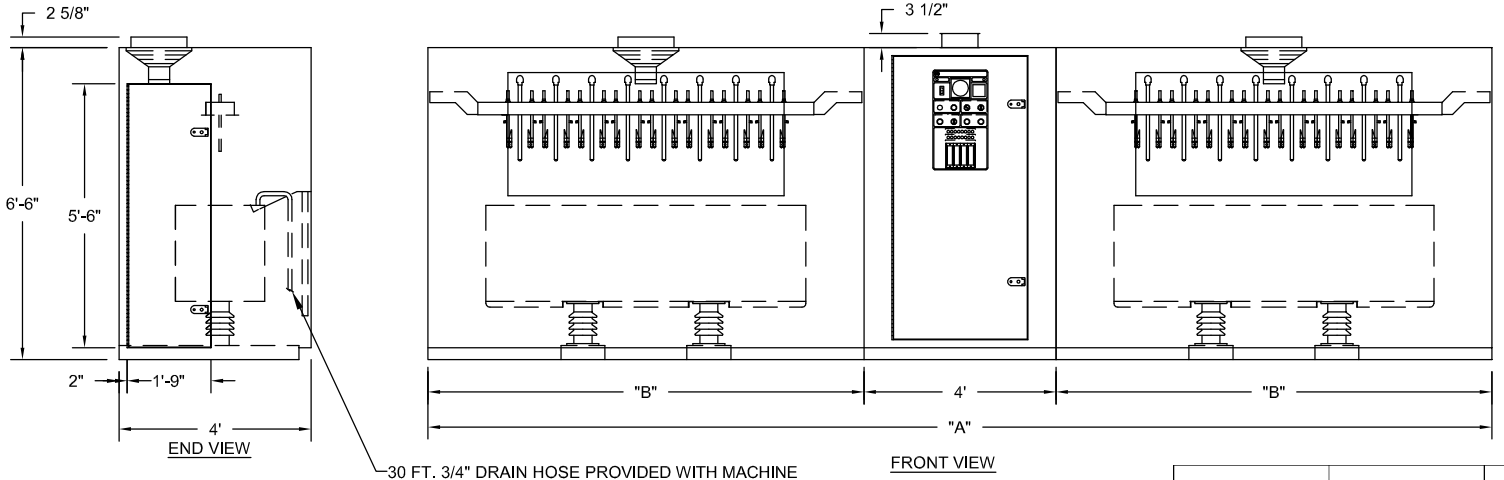

GLOVE POSITIONS PER SIDE	"A"	"B"	"C"	APPROX. SHIPPING WEIGHT
4	16'-2"	6'-1"	3'-1/2"	6300 LBS.
6	19'-2"	7'-7"	3'-9 1/2"	6700 LBS.
8	22'-2"	9'-1"	4'-6 1/2"	7100 LBS.
10	25'-2"	10'-7"	5'-3 1/2"	7500 LBS.
12	28'-2"	12'-1"	6'-1/2"	7900 LBS.
14	31'-2"	13'-7"	6'-9 1/2"	8300 LBS.

1. POWER ENTRANCE: 240 VOLT 60HZ, SINGLE PHASE
(TWO #6 PLUS ONE #2 EARTH GROUND WIRE IN 1 ½ "CONDUIT)
OTHER VOLTAGE INPUTS AVAILABLE UPON REQUEST.

2. AIR INPUT: 3/8" NPT (60 PSI MINIMUM, BULKHEAD FITTING PROVIDED)
SHUTOFF PROVIDED ON SUBPANEL INSIDE POWER PANEL CABINET.

3. WATER INPUT: ½" NPT (50PSI MINIMUM)
BULKHEAD FITTING, AND INLINE WATER FILTER PROVIDED

NOTE 1: THE FLOOR DRAIN MAY BE LOCATED ANYWHERE WITHIN 25 FEET OF THE TEST TANK, BUT GENERALLY IS LOCATED WITHIN THE TEST COMPARTMENT.

NOTE 2: DRAIN HOSE END MUST BE SECURED TO PREVENT "WHIPPING"

NOTE 3: CABINETS CAN BE SEPERATED FOR SHIPPING

- REFERENCES AND REVISIONS -

REV.	DATE:	REMARKS:	BY:
A	3-10-09	UPDATED TO TALL ACCESS DOOR	BMF

This drawing is proprietary information and considered intellectual property of Hanco International. Unauthorized reproducing, electronic transmission, or distribution without written authorization of Hanco International is prohibited.

HANCO INTERNATIONAL
DIVISION OF THE HANNON COMPANY
1605 WAYNESBURG DR. SE
CANTON, OHIO, U.S.A. 44707
PH: 330/456-4728 FAX: 330/456-3323

TITLE:
MODEL "DA" DUAL GLOVE/SLEEVE TESTER
DIMENSIONAL DRAWING

DATE:	SCALE:	SHEET:
2-20-1997	1/4" = 1'	1 OF 1

DRAWN BY	SERIES:	DRAWING NO.:
TOM WHIPKEY	DA	A9036